




Available online at
ScienceDirect
www.sciencedirect.com

Elsevier Masson France
EM|consulte
www.em-consulte.com/en



Short communication

The third KV62 radar scan: Searching for hidden chambers adjacent to Tutankhamun's tomb



Luigi Sambuelli^a, Cesare Comina^b, Gianluca Catanzariti^c, Filippo Barsuglia^d,
 Gianfranco Morelli^d, Francesco Porcelli^{e,*}

^a Department of Environment, Land and Infrastructures, Polytechnic University of Turin, Torino, Italy

^b Department of Earth Sciences, University of Turin, Torino, Italy

^c 3DGeoimaging, Torino, Italy

^d Geostudi Astier s.r.l. Livorno, Italy

^e Department of Applied Science and Technology, Polytechnic University of Turin, Torino, Italy

ARTICLE INFO

Article history:

Received 30 October 2018

Accepted 1st April 2019

Available online 6 May 2019

Keywords:

Valley of the Kings

KV62 tomb

Tutankhamun

GPR

ABSTRACT

The existence of hidden chambers and corridors adjacent to Tutankhamun's tomb (code name KV62) has been long debated. In 2015 it was suggested that these chambers may host the as yet undiscovered burial of Nefertiti. In order to test this hypothesis, two Ground Penetrating Radar (GPR) surveys, conducted in 2015 and 2016 from inside KV62, were carried out, but gave contradictory results. To solve these uncertainties and obtain a more confident and conclusive response, a third GPR survey was conducted by our team in February 2018. The results of this third radar scan are reported in this article. Three GPR systems with multiple frequency bands (from 150 MHz to 3000 MHz) and very dense spatial sampling were adopted. After careful data processing, no evidence of marked discontinuities due to the passage from natural rock to artificial blocking walls were found in the radargrams. It is therefore concluded that there are no hidden chambers immediately adjacent to the Tomb of Tutankhamun.

© 2019 Elsevier Masson SAS. All rights reserved.

1. Introduction and research aim

The tomb of the young pharaoh Tutankhamun is the most famous of all the royal tombs within the Valley of the Kings (VOK) in Luxor. This tomb was discovered, with an almost intact funerary treasure, by Howard Carter in 1922 [1] and it is referred to as KV62 in the standard Egyptological designation. The site of the burial is cut into the floor of the VOK within the natural bedrock, which belongs to the lower member of the Theban Limestone Formation (see, e.g., [2,3]).

The tomb was prepared in a limited time due to the sudden death of the young pharaoh and is much smaller than most royal tombs in the VOK.

In 2015, Egyptologist Nicholas Reeves proposed a theory [4] according to which Tutankhamun's tomb may be part of a larger tomb belonging to Queen Nefertiti. Reeves' hypothesis was based on the examination of high-resolution 3D laser-scan photos taken by Factum Arte to create a digital replica of KV62 painted walls [5]. Reeves identified, beneath the plastered surfaces of the painted

KV62 walls, distinct linear traces that he interpreted as the "ghosts" of two hitherto unrecognized doorways leading to hidden chambers and corridors [4]. These supposed doorways appear to be located across the right portions of the North and West walls of Tutankhamun's funerary chamber (see later Fig. 2). Reeves speculated that these doorways were sealed with stones and later covered with plaster in preparation of Tutankhamun's funerary chamber. Presumably, the sealing of these doorways should be similar to the one found by Carter at the entrance to KV62, constituted by a blocking masonry wall made of blocks and of rough slabs of varying size covered with smaller stones, forming the external layer of the filling, and an eventual wooden lintel situated on top [1].

In order to test Reeves hypothesis, the Egyptian Ministry of Antiquities (MoA) commissioned a first Ground Penetrating Radar (GPR) scan of Tutankhamun's tomb, carried out by H. Watanabe in November 2015 [6]. Indeed, GPR techniques are the most effective method to establish the presence of hidden chambers adjacent to KV62, given the expected physical contrast between the bedrock in which KV62 is carved and the supposed sealed doorways, together with the marked lateral discontinuity that should be present at the corners of these doors, as well as the possible presence of a wooden lintel above the doors. GPR is commonly and successfully used in archeological and forensic applications (e.g. [7,8]). This first

* Corresponding author

E-mail address: francesco.porcelli@polito.it (F. Porcelli).

GPR survey employed a modified Koden KSD-3AM 400 MHz GPR to investigate specific parts of Tutankhamun's tomb. The results seemed to confirm Reeves' hypothesis. In particular, Watanabe's interpretation indicated the presence of two distinct regions (or cavities) of significant empty space beyond the decorated North and West walls of the burial chamber. Furthermore, based on further speculations he suggested also the presence within these cavities of metallic and organic substances [6].

This finding was called "the discovery of the century" and was reported by news and media around the world (see, e.g. [9,10]). The MoA then commissioned a second GPR survey to reconfirm the results of the first KV62 GPR survey. This second survey was carried out by a National Geographic team in March 2016, using a SIR4000 GPR (GSSI) and two antennas, of 400 MHz (Model 50400S, GSSI) and 900 MHz (Model 3101, GSSI), to scan into the walls of the tomb. The antennas were mounted horizontally and installed on a camera 'slider' rail system, which allowed over forty scans to be taken horizontally across the wall at multiple vertical positions [11]. The survey was also supposed to provide crucial information for the planned operation of a specially constructed drill capable of drilling a small hole through which a probe could be inserted into the presumed cavities [12]. However, the second KV62 GPR scan could not confirm the initial findings by Watanabe. In their report, the National Geographic team concluded that no large voids were detected, and no proposed chamber walls could be observed. Therefore, the conclusions of the second KV62 GPR survey were inconsistent with those of the first GPR survey [11].

Given this state of affairs, the MoA called for a third, comprehensive geophysical survey of the tomb of Tutankhamun capable of providing conclusive evidence on the question of the existence of hidden chambers and corridors adjacent to KV62. Our team was invited to submit a project proposal, entitled The third KV62 radar scan: Advanced Technologies applied to the search for void areas and underground structures adjacent to the Tomb of Tutankhamun, which was later approved by the Permanent Committee of the MoA. This article focuses on the results of this project and of the related GPR surveys conducted in February 2018.

The fact that the two previous KV62 radar scans proved inconclusive was a strong indication that the complexity of the task was somehow underestimated. Therefore, in order to counter potential technical difficulties, we decided to carry out the third survey utilizing three GPR systems covering multiple frequency bands, from 150 MHz to 3 GHz. High frequency surveys allow higher resolution for a potential identification of shallow anomalies related to the doorways corners and to the presence of a backfilling structure made by incoherent material, including non-shaped stones blocks. Low frequency GPR surveys promote electro-magnetic (e.m) wave penetration and the potential identification of deeper voids. In addition, different (i.e., vertical and horizontal) antenna polarizations were adopted. An ad hoc frame for the horizontal scanning of the high frequency GPR and an ad hoc lifter for vertical scans of the low and intermediate frequency GPR were designed and realized by our team. A significantly denser survey spacing than in the two previous investigations was planned in order to cover the interested walls with greater accuracy and to carry out a full 3D GPR survey. We decided to carry out GPR scans in the course of a seven-day period, with two four-hour sessions per day. This strategic planning allowed us to confront unforeseen complexities, which arose in the first two days of the surveys, and to come up with technical solutions. We considered important not only to acquire enough high-quality data, that would allow reaching a conclusive answer on the possible existence of hidden chambers adjacent to KV62, but also to provide a plausible explanation of why the previous two radar scans gave contradictory results. At the end, the collected data obtained in the course of a very large number of horizontal and vertical scans of the relevant KV62 walls summed up to about 2.7 km of

radagrams, which is estimated to be about one order of magnitude more than those collected by the two previous KV62 GPR surveys combined. This paper discusses how we measured, processed and interpreted this huge amount of data. It is worth mentioning that a fourth, low-frequency unshielded high-power GPR antenna, capable of penetrating several meters, was also provided by Terravision, a geophysical company based in the UK, within the framework of our project. The Terravision team joined us in Luxor and carried out measurements within the tomb during two sessions. The Terravision team was also supposed to work outdoor looking down underground from the top of KV62 but they could not complete such planned data acquisition.

Our investigation could also benefit from data and information of an Electrical Resistivity Tomography (ERT) survey in the area surrounding Tutankhamun's tomb performed by our team in May 2017 [13,14]. The ERT imaging showed two anomalies located underground a few meters from Tutankhamun's tomb, although no evidence of a corridor or empty spaces adjoining these anomalies with KV62 was found in the ERT data. Therefore, in addition to testing Reeves' hypothesis and understanding the results of the two previous radar scans, the third KV62 radar survey was also intended to establish whether a passageway of some sort existed connecting Tutankhamun's tomb to the two newly found ERT anomalies.

2. Material and methods

We adopted three different frequency bands (Low Frequency (LF) 150–200 MHz, Intermediate Frequency (IF) 600–900 MHz and High Frequency (HF) 1500–3000 MHz) for the surveys, with scans along vertical and horizontal directions and very close profile spacing (see Supplementary Material) in order to obtain a very dense spatial sampling. We moreover employed double antenna polarizations, with transmitting and receiving dipoles both orthogonal (TE – Transverse Electric mode) and parallel (TM – Transverse Magnetic mode) to the profile direction. Due to the requirement of scanning the walls without damaging their precious decorations, a special equipment was designed and realized by our team in order to move the antennas at a certain distance from the walls. As a consequence of the significant irregularities of the KV62 burial chamber walls, we therefore acquired the data at variable distances from the wall surface, roughly ranging between 0.05 and 0.1 m.

A common reference system was used for a mutual positioning of the different surveys. This reference system has its origin in the SW corner of the KV62 burial chamber (see Fig. 1), with the x-axis parallel to the North wall, the y-axis parallel to the West wall and the z-axis representing the height from the floor. We also collected calibration sections, for all three frequency bands used, in different positions within the burial chamber and the surrounding rooms in order to evaluate the ability of the adopted radar systems to recognize known voids or back-wall structures. The location of the calibration profiles is depicted in Fig. 1. In the following, the acquisitions performed with the different radar systems are briefly discussed, further details on the acquisition and profile distribution are provided in the Supplementary Material section.

2.1. High Frequency (HF) scans

We planned the HF scans in order to investigate a stripe, about 1.5 m high, along the West and the North walls. We realized the stripe in segments, or panels, each one about 1.5 m long, by means of an on-purpose built wooden frame resting on a flat platform (see Supplementary Material). We moved both the frame and the platform after the complete scanning of a single panel was achieved. Each panel is composed of several horizontal scans, obtained by sliding the antenna on a horizontal wooden bar starting from the

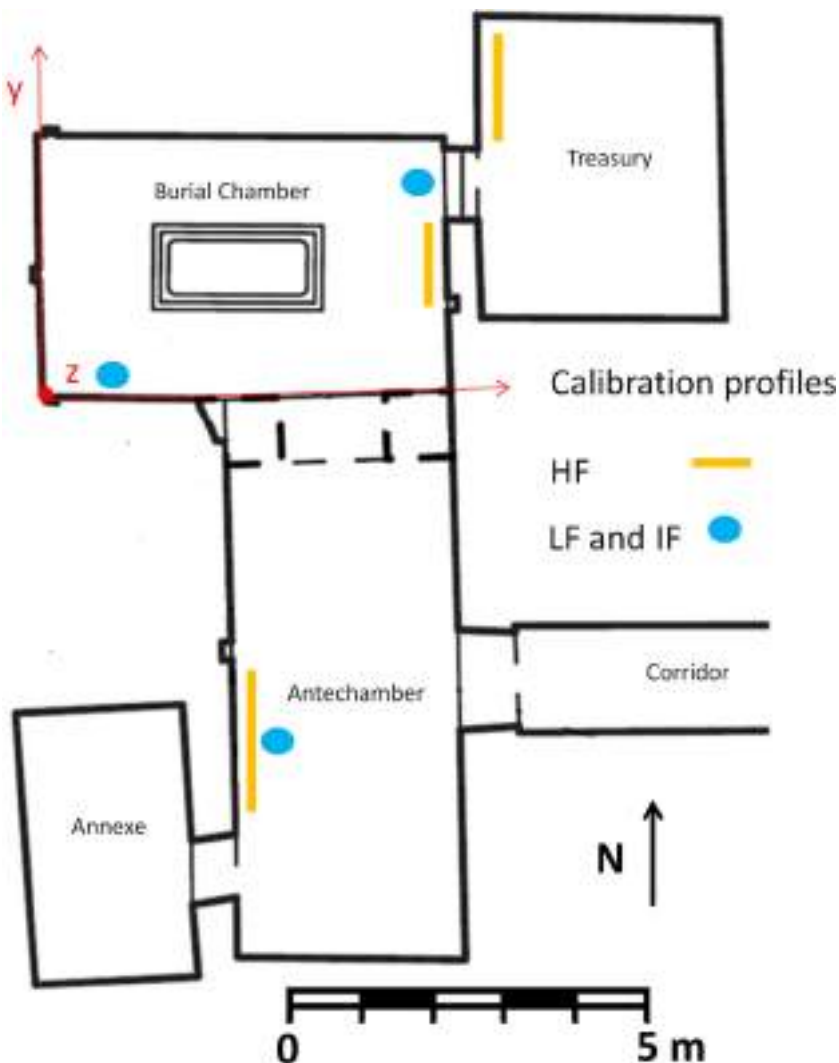


Fig. 1. plan view of the KV62 with indication of the reference system used for survey positioning and the location of the calibration profiles: yellow lines are the HF scans profiles, cyan dots are the planar projection of the vertical LF and IF profiles (modified from [15]).

bottom of the panel (located at approximately 0.75 m from the floor) to its top. Fig. 2 represents a sketch of the frame positions and of the area covered by HF scans along the West and North walls. As it can be observed, panels are partly overlapping and a superposition of the frame positions has been adopted in some locations. In Fig. 2c and d numbering refers to traces identified by Reeves on the 3D laser-scan photos and to his speculation on these traces.

We acquired all the GPR profiles with a GPR unit composed by an Aladdin 2 GHz IDS antenna box and an IDS K2 control unit. A wheel encoder was used to track the position of the antenna along the sliding bar for each GPR profile. The Aladdin box has two couples of transmitting and receiving dipoles: orthogonal (TE mode) and parallel (TM mode) to the profile direction. Signals from both these modes of operation can be transmitted and acquired simultaneously. We acquired data for a trace duration of 40 ns and 1024 samples per trace at a sampling frequency of 25.6 GHz. The trace interval in the scan direction was of 0.01 m while the scan spacing in the vertical direction (approximately depicted in Fig. 2) was of 0.04 m. Each panel is on average composed of 78 radargrams (39 for each acquisition mode). The total number of acquired radargrams for the two modes along the North and the West walls of KV62 funerary chamber is therefore 546, for an acquisition length of about 820 m.

2.2. Low Frequency (LF) and Intermediate Frequency (IF) scans

We acquired LF scans with an IDS RIS TR200 shielded antenna operating in TE mode. The antenna unit was driven by a DAD-MCH fast wave control unit and was vertically deployed along the burial chamber walls by means of an electrical aluminum lifter specifically designed and developed for the present surveys. In order to trigger the pulse emission and to record GPR traces at fixed space intervals, an optical encoder was mounted on the axis of a pulley winch connected to the lifter engine. We collected data along the vertical direction, from bottom to top (Figs. 3a and 3a).

On average, we scanned the investigated walls at a height between 0.3 and 2.5 m from the floor. We acquired data for a trace duration of 128 ns and 1024 samples per trace at a sampling frequency of 8 GHz. We recorded traces each 0.003 m along the profile direction whilst spacing between adjacent profiles was set to 0.2 m. We acquired a total of 51 profiles, for an acquisition length of about 100 m.

We acquired IF scans with a dual polarization multi-channel IDS Stream-C system. The same aluminum lifter used for LF scans was adopted to slide up and down the multi-channel antenna along the walls (Fig. 3c). The Stream-C allowed to simultaneously record, by a single swath, 23 radar profiles in TM-mode and 9 radar profiles in TE-mode. The Stream-C multi-antenna has indeed TM and TE

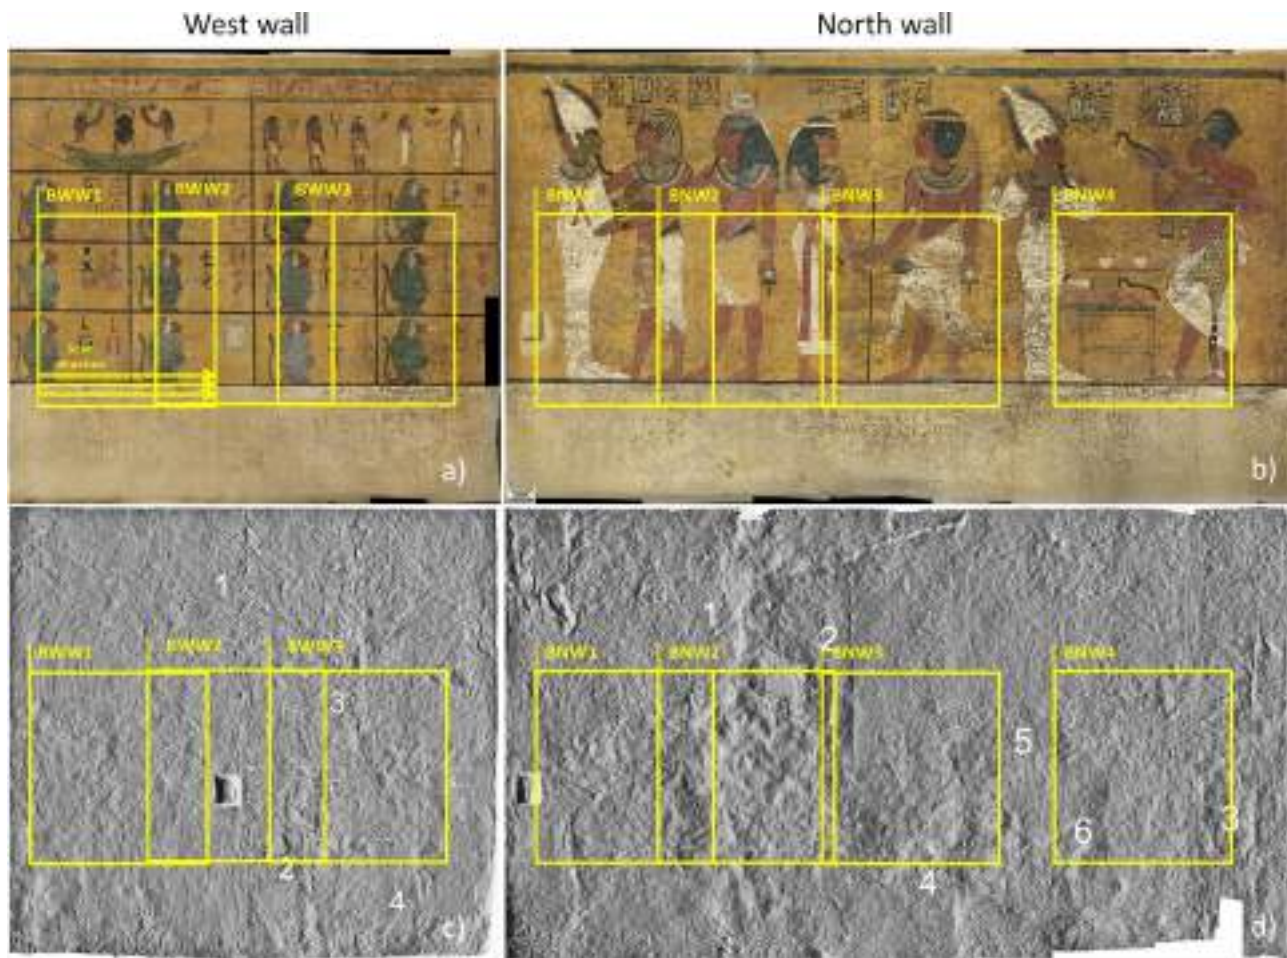


Fig. 2. The positions and the areas covered by the HF surveys along the West and North walls (yellow polygons) superimposed to pictures of the walls (in a and b) and to laser scans images (c and d); In a the scan direction and approximate spacing (constant for every panel) is also indicated; Numbers in c and d refers to Reeves hypotheses and respectively: in c) 1 and 3 natural faults in the rock, 2 and 4 artificially defined edges, in d) 1 natural, 2 and 3 artificially cut, 4–6 outline of an internal doorway (modified from [4]).

arrays centered along two parallel horizontal axis vertically shifted by 0.19 m, with a channels spacing of 0.0435 (TM) and 0.099 m (TE), respectively. We acquired data for a trace duration of 80 ns and 512 samples per trace at a sampling frequency of 6.4 GHz. The trace interval in the scan direction was of 0.003 m. A total of 452 closely spaced dual polarized radar profiles were collected during IF scans, for an acquisition length of about 530 m.

3. Results

The three collaborating groups processed the data acquired with the different GPR systems independently and with different software [16,17], to avoid biasing and cross influences. Only after a satisfying processing step was reached we discussed and uniformed the processing flow in order to obtain a consistent result for all the surveys. Details on the processing flow adopted for the different radar systems are reported in the Supplementary Material section.

Successful imaging of known voids and structures (notably, the Annex and the Treasury in KV62) over calibration profiles was used to test the data processing flow and to evaluate the potentiality and limitations of the adopted surveying approach. Details of the results obtained over calibration profiles are reported in the Supplementary Material section. Here, the main results of the calibration procedure are summarized as follows:

- a reliable estimation of the propagation velocity (0.12 m/ns) of the GPR pulse in the rock around the tomb was obtained from diffraction hyperbolae;
- a clear void identification over known wall thickness ranging from 0.55 m (wall separating the Burial Chamber from the Treasury Chamber) to 0.8 m (wall between the Antechamber and the Annex) was observed; conversely, both IF and LF calibration profiles performed along the south wall of the Burial Chamber (for exact location see Fig. 1) failed in locating the known void of the Annex at about 5 m depth. This indicated that attenuation factors were higher than expected; therefore, smaller maximum investigation depths, particularly for LF scans, should be expected.

3.1. Wall scans

Fig. 4 illustrates examples of the results obtained by the High Frequency (HF) scans. Sections taken from the 3D-assembled processed HF scans are shown in Fig. 4a. The adopted reference system is the one shown in Fig. 1. The color scale used for the representation of all the radargrams is based on the Normalized Absolute Amplitude of Reflection (NAAR) saturated at 0.25 to enhance lower values.

The results presented are typical examples of the ones obtained over the whole investigated volume. Higher reflection amplitudes are generally observed in the first 0.5 m, along the scanned walls. There are explanations for this phenomenon. First, we did not



Fig. 3. Pictures taken during LF and IF radar scans showing: a) and b) the IDS TR200 shielded antenna and c) the multi-channel IDS Stream-C system deployed by the lifter.

recover all the energy of the pulse as it propagates into the rock. In fact, the intrinsic attenuation of the material is not well known, therefore we simply applied a typical gain compensating for the spherical divergence of the signal. If, on one hand, the choice of a higher gain could magnify other deeper reflections, on the other hand it could enhance noise and/or ghost signals. Secondly up to a depth of 0.5 m into the wall, the signal could be affected by a higher fracture density because of the physics of pick excavation. These widespread fractures could result in the spread reflections visible in nearly all the radargrams within a depth of 0.5 m into the walls.

Along the North wall from x-coordinate values between 1.6 to 2.2 m (indicated by area 1 in Fig. 4a), the reflection amplitude at

shallow depth is enhanced due to the presence of a well-known wall repair [18]. We did not notice other marked shallow anomalies along the walls even at different elevations. Near the top of the N-W section, at a depth of about 2 m, a linear reflection is also clearly visible (indicated by area 2 in Fig. 4a). This is the only deep reflection that has been identified from HF scans within all the investigated volume. In Fig. 4b, the orientation of this linear reflection is better visualized. At about two meters behind the North wall, horizontal and vertical sections of the 3D volume evidence the traces of a plane sub-parallel to the North wall and dipping North of about 80° (dipping plane in Fig. 4b). The presence of this reflection is important for two reasons: given its clear visibility, it is an indication that the investigation depth is likely around 2 m;

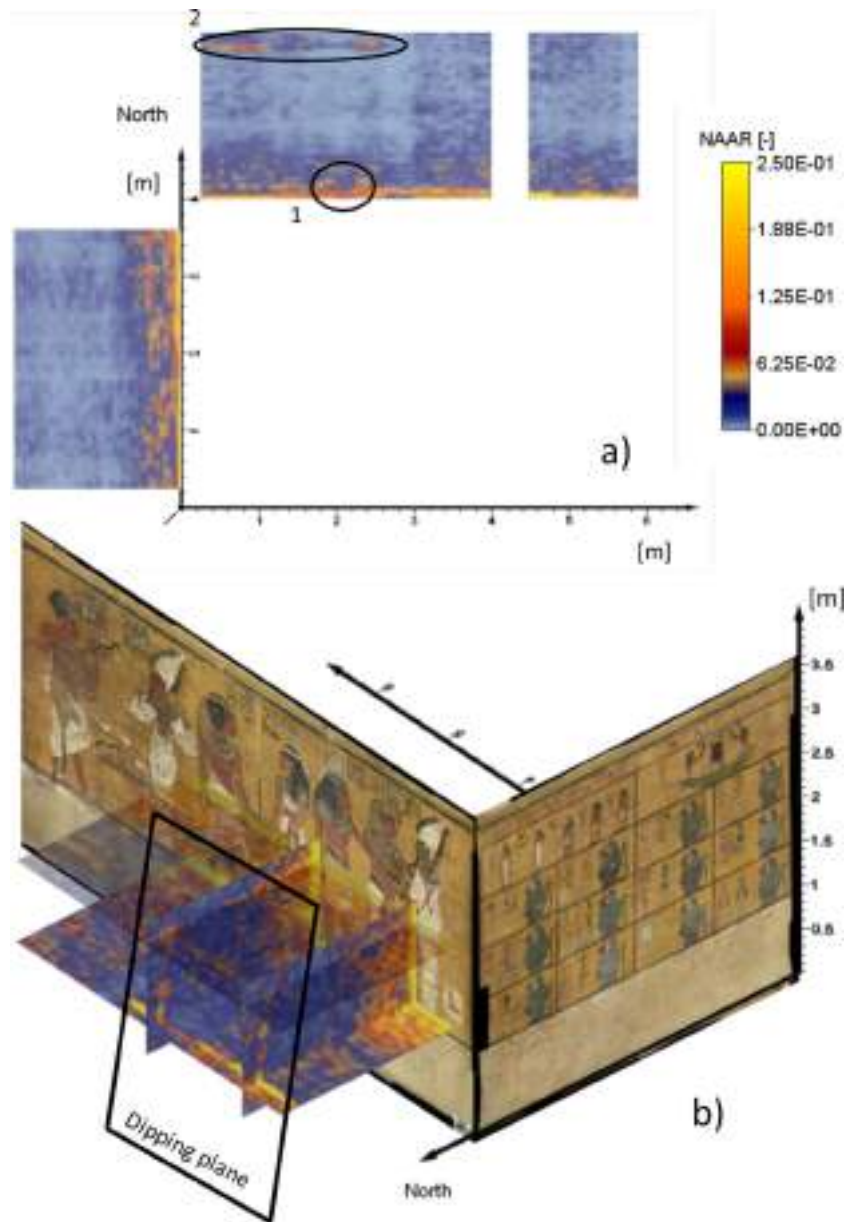


Fig. 4. HF-TM mode processed data: a: Top view of the sections at 1 m from the floor, with evidence of: 1) high amplitude shallow events related to the wall repair and 2) a 2 m deep linear reflection event; b: 3D view of some significant sections: behind the North wall, a clear fracture plane emerges from the combination of vertical and horizontal sections.

furthermore, it is a clear evidence of a natural fracture belonging to a well-recognized sub-vertical EW fracture system [3]. This means that the GPR pulse likely travels in the host rock only, since it does not intercept other reflecting surfaces due to anthropic structures between the wall and the aforesaid fracture.

Results obtained for LF and IF scans are similar to the ones reported for HF scans and are illustrated by Fig. 5. Horizontal and vertical cross sections resulting from 3D-assembling and data processing are shown in this figure. Along the North wall, in a similar position than for HF scans, the increased reflection amplitude due to the wall repair can be noted both in the horizontal cross sections (A in Fig. 5a and b) and in the vertical ones (A in Fig. 5d). In the horizontal cross sections this effect is, for both LF and IF scans, more localized and persistent with increasing time with respect to HF scans. The extension of the wall repair is however very clear and localized as shown in a vertical cut at 0.6 m depth from the

IF GPR volume (A in Fig. 5d). As previously discussed, the profiles acquired along the South wall failed in identifying the known void volume corresponding to the Annex (Fig. 5a and b) while a clear evidence of the wall separating the Burial Chamber from the Treasury Chamber is observable for both LF and IF scans (B in Fig. 5a, b and c). Given these results, we can therefore assume that investigation depth from LF and IF scans are limited to about 3–4 m.

In IF scans, a deep linear reflection can be also noted behind the West wall (C in Fig. 5b). This reflection can be caused by a fracture within the rock mass, similarly to the one reported for HF scans. An alternative explanation could be also a rebound effect of the radar pulse from the opposite east wall of the Burial chamber. No other relevant anomalies result from the scans also at different elevations within the 3D volume. This can be further observed in Fig. 6, where representative IF radargrams, showing the response recorded from the KV62 burial chamber walls, are reported.

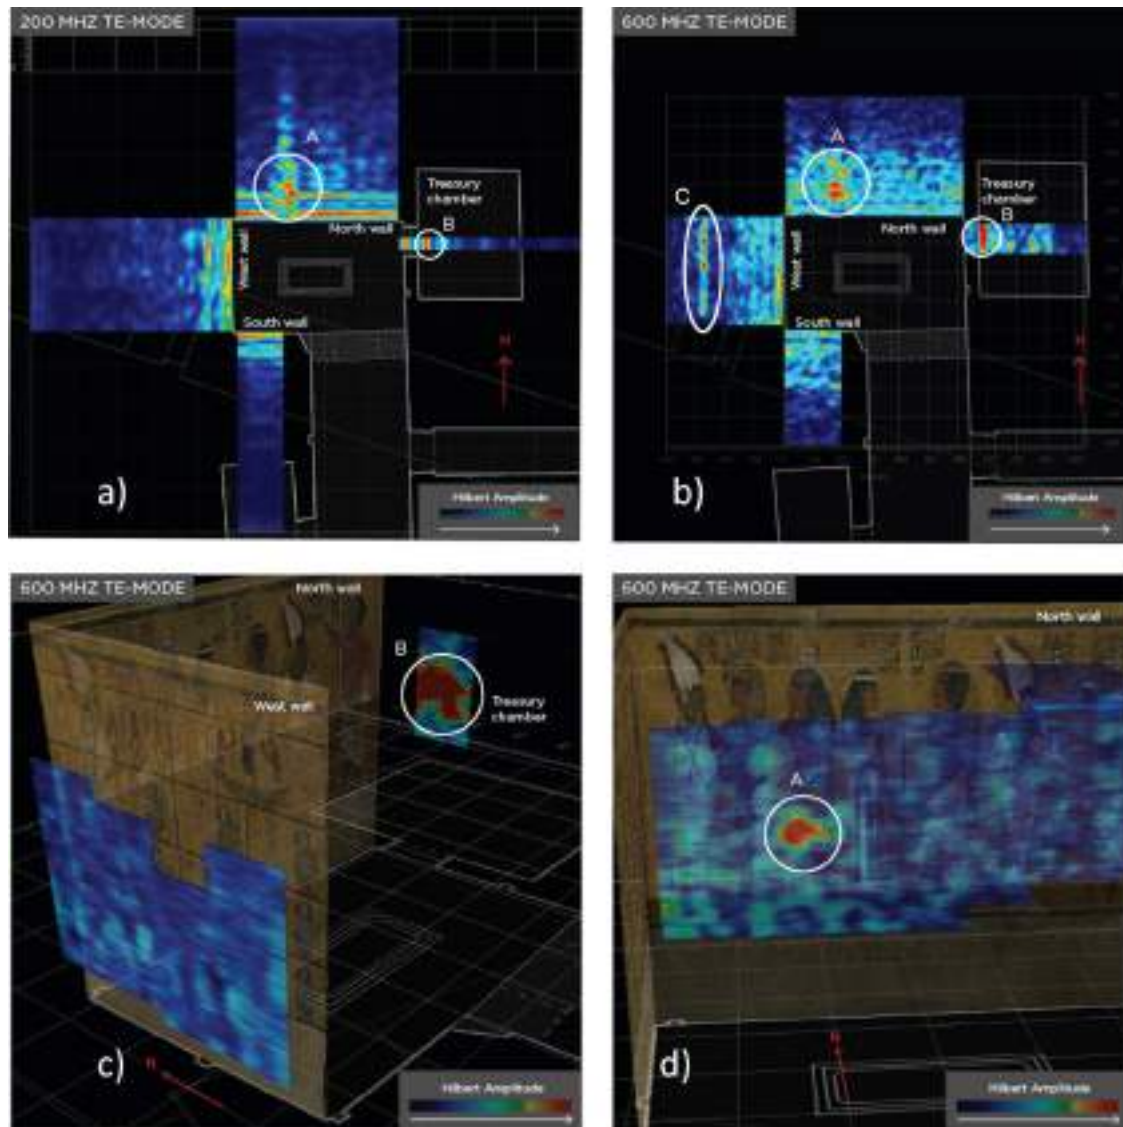


Fig. 5. IF and LF processed data: top view of representative horizontal cross sections for a: LF processed data and b: IF processed data, vertical cuts at 0.6 m depth from the IF GPR volume (TE-mode) behind the west c) and north wall d) are also reported. Evidence of: A wall repair anomaly, B wall separating the Burial Chamber from the Treasury Chamber and C deep linear reflection event are reported in all the panels.

4. Discussion

We consider the results obtained from the processing and the interpretation of the third KV62 radar scan sound and definitive with a high degree of confidence. However, there are few open questions that deserve a discussion and may be the subject of further work.

In High Frequency (HF) profiles, the effect of the frame supports are stronger than in preliminary tests carried out on other masonry walls outside the tomb. Even though some diffraction hyperbolae were visible in these preliminary tests, they had an energy significantly lower than those recorded within KV62. These observations suggest that the electromagnetic properties (permittivity, permeability, conductivity) of the plaster supporting the paintings is very different from the ones of the natural rock, therefore strongly influencing wave propagation. Given the considerable humidity of the KV62 burial chamber, water could have penetrated the shallow surface, therefore lowering the resistivity of the plaster and transforming this variable-thickness layer in a conductor. The superficial plaster layer could act as a wave-guide, inducing the e.m. waves traveling in the plaster to leak toward the room and be scattered

back from the aluminum and wooden supports, giving rise to the diffraction hyperbolae observed in the radargrams. A similar effect could cause also the rebound reflections observed in Intermediate Frequency (IF) scans. In order to simulate the reliability of this scenario, appropriate values of the e.m. properties of both the plaster and the rock behind are needed. Indeed, it is known that the host rock belongs to the lower member of the Theban Limestone Formation, but it is not clear if it is a limestone, a marly limestone or a marl (see, e.g., [2,3]). From our earlier ERT surveys carried out on the hill above KV62, [13,14], we found that the rock surrounding the tomb had an average value of resistivity ρ (at zero frequency, i.e. under continuous current) of about 3000 Ohm-m. The propagation velocity of the GPR pulse obtained from our calibration tests inside KV62 is consistent with a value of relative permittivity ϵ of about 6.25 (see also National Geographic, 2016 [11]). Then, assuming a relative permeability μ equal to 1, a calculation using Maxwell and radar range equations (e.g. [19]) indicates that, with the 200 MHz antenna, a reflection of the North wall of the Annex, at 5 m distance from the South wall of the Burial Chamber, should be visible at about -45 dB. Taking into account also the other losses due to the pulse impinging on the wall surface and to the system performance,

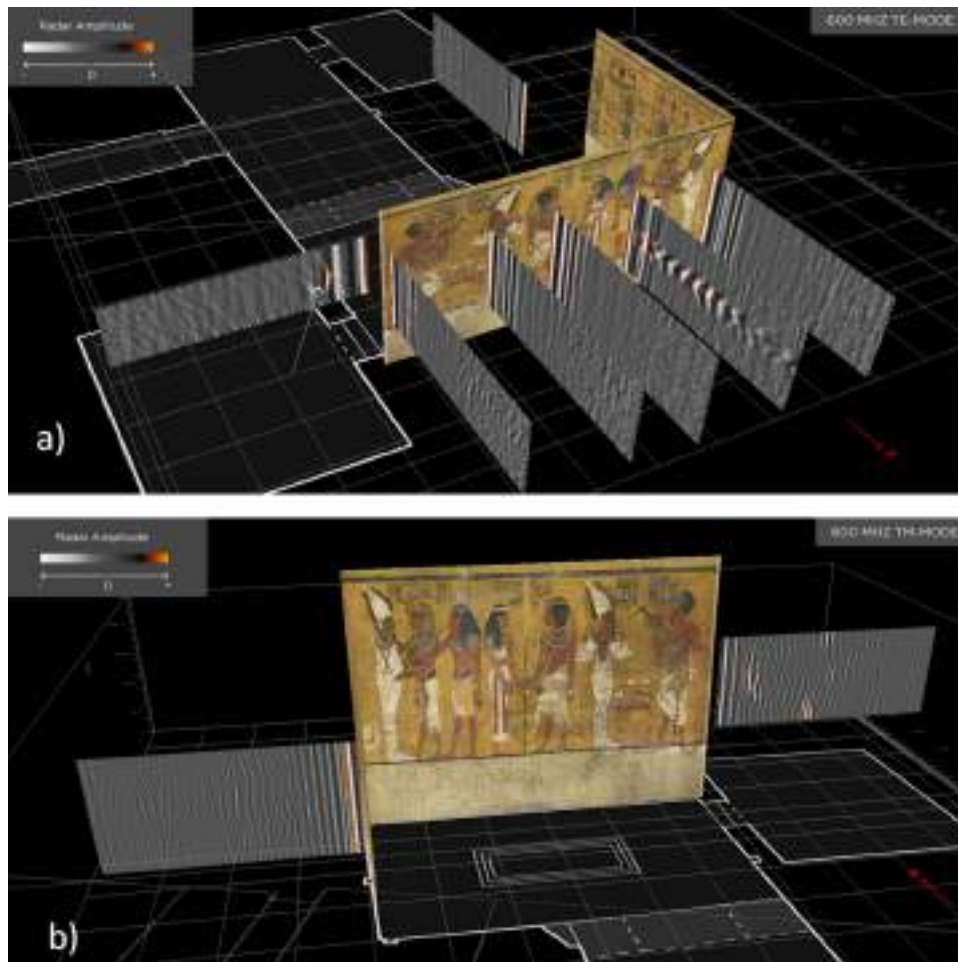


Fig. 6. IF processed data: perspective view of IF scans showing the response recorded from: a) the North, East and South walls and b) from the East and West walls.

a 90 dB system should be able to detect the reflected pulse. On the other hand, the rock resistivity may be a function of the e.m. wave frequency, and at the GPR frequencies adopted in our survey it may differ substantially from the one obtained with continuous current (as with ERT). If the resistivity of the limestone at 200 MHz were 500 Ohm m [20], the calculation with the same values of the other parameters would lead to a reflection at about -55 dB. Higher attenuations are clearly to be expected in the higher frequency range. We therefore believe that the missing reflected signal is due to either the air gap between the antennas and the wall, or to the intrinsic attenuation of rock and plaster, or a combination of these two effects. A laboratory estimate of the e.m. properties of the rock hosting KV62 would then be desirable. With guided wave devices [20], it should be possible to have, at least in laboratory on rock samples, a good estimate of the e.m. properties of a rock material within the GPR frequency band.

It is also still to be evaluated, particularly in HF band acquisitions, how much the variable dipole-wall distance and the different thickness of the plaster affect the signal. In order not to touch the paintings, the antennas mounted on the frames were moved on virtual planes nearly parallel to the walls. In fact, the walls inside KV62 are not smooth planes; rather, they present a waving surface that can differ from an ideal interpolating plane by 0.01 to 0.05 m. This means that even if the acquired profiles lay on a plane, there can be a variable thickness of air between the antenna and the wall. Especially in HF band, which has a dominant wavelength in air equal to 0.15 m, this air gap could play an important role both in the amount of energy entering the wall and in the banding noise (hor-

izontal stripes) within the GPR records. Moreover, and very likely, the plaster has different thickness along the walls. This difference can affect pulse propagation and absorption.

5. Conclusions

According to the processed data from High Frequency (HF) acquisitions, we can state that all the radargrams appear to be substantially similar along the investigated walls: no marked lateral discontinuities due to the passage from natural rock to artificial blocking wall are evidenced. In other words, no evidence is found of a vertical plane (orthogonal to the scanned walls) that could be interpreted as the boundary between the rock and a blocking wall. Nor we see reflections attributable to the jambs or the lintel of a door. Within the depth investigated by HF scans (about 2 m), there is no evidence of plane reflectors (parallel to the scanned walls) that could be interpreted as chamber walls, like the ones seen in calibration profiles. Conversely, we see at least a clear fracture within the natural host rock in a particular location.

According to the data analysis and post-processing from Low and Intermediate Frequency acquisitions we can state that, within an estimated maximum investigation depth of 3–4 m, the radargrams show a homogenous response not supporting the presence of voids (i.e. empty chambers) or masonry structures concealing blocked doors. Both LF and IF datasets show apparent vertical discontinuities and ringing effects caused by the acquisition conditions and provide a different response on the sector of the Northern wall where an ancient wall repair exists. This response, probably

emphasized by the air gap between the antenna and the wall surface, gives a clear idea of the effects that can be caused on the GPR signal by a relative thin patch interrupting the dielectric continuity of the natural host rock. On this basis, and according to our experience, similar or stronger effects distributed over larger areas would have been expected if an artificial blocking made by splinter of limestone was present. However, this type of effects were not visible in the data.

Our work suggests that the first KV62 GPR survey was likely misled in its conclusions by ghost signals, i.e., rogue radar reflections originating in front of the walls, not beyond them. Under normal circumstances, a GPR antenna sends radar waves straight through the wall, and they bounce right back to the receiver, providing a very clear signal. But it appears that in KV62, only part of the radar waves went through, while the other part traveled along the walls surfaces before returning to the receiver. There are many suspected reasons for this complex behavior. First of all, for totally understandable reasons, we were not allowed to slide the antennas directly over the painted walls. Thus, the e.m. waves traveled first through an air layer of variable thickness between 0.05 and 0.1 m, as KV62 walls are not perfectly smooth and vertical. This fact, on one hand, limited the amount of e.m. wave energy going directly through the wall and, on the other hand, posed a challenge to the required level of accuracy in monitoring the relative position between the antennas and the walls. Secondly, beyond the air layer, the e.m. waves had to go through a plaster of variable thickness, whose e.m. properties are not exactly known. As a first approximation, the plaster could be thought of as made of powder from the local shale (huba), with the addition of some organic material. Despite the many tests on plaster samples taken from KV62 and other tombs (see, e.g., [18,21,22]), no dedicated tests on its e.m. properties, nor data on its actual water content, are available. In any event, due to combined presence of organic materials and moisture, the plaster appears to be able to conduct electricity and thus to play the undesirable role of a wave guide carrying part of the GPR e.m. waves along the wall surfaces. Even though the plaster is the primary suspect, we note that the rock itself into which KV62 is carved may have similar e.m. properties. Thus, considering also the reduced dimensions of Tutankhamun's funerary chamber (approximately 6 m × 4 m × 3 m), the waves traveling along the wall surfaces would bounce back to the receiver, carrying with them spurious information originating from the walls opposite to the one being scanned, and perhaps even from Tutankhamun's massive quartzite sarcophagus, which takes up much of the central burial chamber. This spurious information is what we refer to as ghost signals.

It is perhaps of interest to report that in the first two days of our survey, we were misled by these ghost signals but, given the several measuring session and the different acquisition systems, we could cross-check and eliminate the spurious signals. Finally, we agree with the conclusions of the second GPR survey, which did not confirm Watanabe's results [11]. However, probably due to the limited time availability and spatial extension, the second KV62 GPR survey was unable to provide a convincing conclusive answer. Therefore we can conclude, with a high level of confidence, that Reeves' theory concerning the existence of hidden chambers adjacent Tutankhamun's tomb is not supported by the GPR data.

Acknowledgments

We would like to thank Dr. Khaled El-Anany, Egyptian Minister of Antiquities, for believing in the potential of geophysical research applied to archaeology and for promoting the third KV62 radar scan. We are deeply grateful to Dr. G. Capriotti Vittozzi of the Italian

Archeological Center in Cairo, for her continuous support, strategic management and valuable discussions on the project. We would also like to thank Dr. Dean Goodman for the GPR-SLICE software support, Dr. Mamdouh El-Damaty, Dr. Nicholas Reeves and Dr. Fred Hiebert for useful and motivating discussions and last but not the least Samir Zaki for his fundamental help in the data acquisition.

This work was supported by the National Geographic Society (NGS Explorer Grant SP 37-16 and Nefertiti Program X10380) and by the Fondazione Novara Sviluppo; Geostudi Astier s.r.l. and 3DGeoimaging also significantly participated to the research expenses.

Appendix A. Supplementary data

Supplementary material related to this article can be found, in the online version, at <https://doi.org/10.1016/j.culher.2019.04.001>.

References

- [1] H. Carter, A.C. Mace, *The Tomb of Tut*Ankh*amen*, Cassell and Company Ltd., London, 1923.
- [2] M.P. Aubry, W.A. Berggren, C. Dupuis, H. Ghaly, D. Ward, C. King, R.W.O'B. Knox, K. Ouda, M. Youssef, W.F. Galal, Pharaonic necrostratigraphy: a review of geological and archaeological studies in the Theban Necropolis, Luxor, West Bank, Egypt, *Terra Nova* 21 (2009) 237–256.
- [3] C. Dupuis, M.P. Aubry, C. King, R.W.O'B. Knox, W.A. Berggren, M. Youssef, W.F. Galal, M. Roche, Genesis and geometry of tilted blocks in the Theban Hills, near Luxor (Upper Egypt), *J African Earth Sci* 61 (3) (2011) 245–267.
- [4] N. Reeves, *The Burial of Nefertiti? A publication of the Amarna Royal Tomb Project*, University of Arizona, Tucson, AZ, USA, 2015.
- [5] Factum Arte, 2015, <http://www.highres.factum-arte.org/Tutankhamun/>, with additions, copyright© Factum Arte/Ministry of State for Antiquities and Heritage, Egypt.
- [6] H. Watanabe, Report on the radar survey of the tomb of Tutankhamun (KV 62), Terra Information, Yokohama translated by Shohta Ueno and Alexandra J. Park (2015) (Copyright © Hirokatsu Watanabe, 2015, unpublished).
- [7] D.J. Daniels, *Ground Penetrating Radar*, 2nd edition, The Institution of Electrical Engineers, London, 2004, pp. 15–734.
- [8] D. Goodman, S. Piro, *GPR Remote Sensing in Archaeology*, Springer, 2013, pp. 11–233.
- [9] N. El-Aref, *Discovery of the Century? Al-Ahram Weekly* (2015) (Issue 1273, 3–9 November 2015).
- [10] Michaelson R., Walker P., 2016, Tutankhamun's secret? Experts hope new chambers could contain tomb of Nefertiti, in *The Guardian*, 18 March 2016.
- [11] National Geographic Society (2016) The kv 62 survey #2 team, *Ground Penetrating Radar - kv 62 GPR survey #2: Report to the Egyptian Ministry of Antiquities* (unpublished).
- [12] Hiebert, Fred (2016), Private communication.
- [13] Fischanger, Federico, et al., Geophysical anomalies detected by Electrical Resistivity Tomography in the area surrounding Tutankhamun's tomb, *J. Cult. Herit.* (2018), <http://dx.doi.org/10.1016/j.culher.2018.07.011>.
- [14] F. Porcelli, G. Catanzariti, F. Barsuglia, F. Fishanger, G. Morelli, Luigi Sambuelli, C. Comina, G. Capriotti, A. Ellaithy, La mappatura Geofisica complete della Valle dei Re: Risultati preliminary del primo anno di attività, in *RISE - Italian Research and Excavations in Egypt VII* (2018) 33–56, 2017.
- [15] K. Weeks, "The Atlas of The Valley of the Kings", Theban Mapping Project, American University in Cairo Press (2003).
- [16] D. Goodman, GPR-SLICE. Ground Penetrating Radar Imaging Software. User's Manual (<http://www.gpr-survey.com/practice/GPR-SLICE>), 2004.
- [17] Sandmeier (2018), Reflex 8.55, <http://www.sandmeier-geo.de/Download/reflexw.manual.a4.pdf> visited on 04/04/2018 h 11:00.
- [18] L. Wong, S. Rickerby, a. Phenix, A. Rava, R. Kamel, Examination of the wall paintings in Tutankhamun's Tomb: Inconsistencies in original technology, Contribution to Vienna Congress, The J. P. Getty Trust (2012) (10.11792047058412Y.0000000035).
- [19] J. Milsom, A. Eriksen, *Field geophysics*, Fourth Edition, Wiley & Sons Ltd, 2011 (287 pp, ISBN: 978-0-470-74984-5).
- [20] D. Vaccaneo, L. Sambuelli, P. Marini, R. Tascone, R. Orta, Measurement system of complex permittivity of ornamental rocks in L frequency band, *IEEE Transac. Geosci. Remote Sensing* 42 (11) (2004) 2490–2498.
- [21] L. Wong, S. Rickerby, A. Rava, A. El- Din, M. Sharkawi, Developing approaches for conserving painted plasters in the royal tombs of the Valley of the Queens, Lima, Peru, Proceedings of the XI International Conference on the Study and Conservation of Earthen Architecture Heritage (2012).
- [22] R.A.J. Wust, J. McLane, Rock deterioration in the royal tomb of Sethi I, Valley of the Kings, Luxor, Egypt, *Eng. Geol.* 58 (2000) 163–190.